



Vibration Pen ^{plus}

CMVP 40 (in/s) eq. Peak
CMVP 50 (mm/S) RMS



Overall Vibration and Acceleration Enveloping

Overview

A Multi-Parameter approach to condition monitoring provides two different methods for monitoring machinery condition. This allows for early detection of specific machinery problems and provides more ways to measure changes in machinery condition.

The Vibration Pen ^{plus} is a Multi-Parameter vibration monitoring tool capable of measuring vibration (caused by rotational and structural problems like imbalance, misalignment, looseness, etc.), and capable of measuring vibration in higher frequencies (caused by rolling element bearing or gear mesh problems).

Multi-Parameter Monitoring is the most thorough and effective method for monitoring bearing and machinery condition. The Vibration Pen ^{plus} tool's Multi-Parameter approach provides accurate and reliable data upon which to base maintenance decisions and promotes early detection, confirmation, and accurate trending of bearing and machinery problems.

Functional Description

When performing measurements, the Vibration Pen ^{plus} tool's sensor input signal is processed to produce two different measurements for each machinery POINT, Overall Vibration and Enveloped Acceleration.

The Vibration Pen ^{plus} tool's LCD simultaneously displays both measurement values. Depending on the type and location of the machinery component being measured, either or both readings may be of interest.

OVERALL VIBRATION

(ISO 10816, Part 1-6) Low Frequency Vibration (10 Hz to 1 kHz)*

Overall velocity vibration occurring in the 10 Hz to 1 kHz frequency band is considered the best operating parameter for judging rotational and structural problems like imbalance, resonance, misalignment, looseness, and stress applied to components.

Many machinery problems may cause excessive overall vibration. Mechanical looseness, imbalance, soft foundation, misalignment, rotor bow, resonance, eccentricity, bad belts, or lost rotor vanes can all be measured with overall ISO* vibration measurements.

Measuring the overall vibration of a machine or component, or the structure of a machine, and comparing the measured value to the machine's normal value (or to ISO 10816 standards) indicates machinery health and condition changes.

- ▶ Overall vibration is not an indicator of bearing or gear mesh problems that typically occur in higher frequency ranges.

ENVELOPED ACCELERATION

Bearing/Gear mesh Frequency Vibration (10 kHz to 30 kHz)

Enveloped Acceleration measurements measure the high frequency repetitive vibration signals typically caused by bearing and gear mesh problems.

Envelope detection is very useful in rolling element bearing and gear mesh analysis where a low amplitude, repetitive vibration signal may be hidden by the machine's rotational and structural vibration noise.

For example, suppose a rolling element bearing has a defect on its outer raceway. Each rolling element strikes the defect as it passes the defect, causing a small, repetitive vibration signal. This vibration signal is of such low amplitude that, under normal ISO vibration monitoring, it is lost in the machine's other rotational and structural noise.

Envelope detection filters out low frequency rotational signals, then enhances the high frequency defect signals to focus on repetitive events in the 10 kHz to 30 kHz frequency range, and provides an averaged peak value for early detection of bearing and gear mesh problems.

- ▶ Enveloped acceleration measurements do not detect rotational or structural vibration caused by imbalance, misalignment, looseness, etc.

Easy Operation

Vibration Pen ^{plus} readings are easily performed, simply:

- Turn the Vibration Pen ^{plus} on.
- Press the Vibration Pen ^{plus} tool's sensor tip against your machinery measurement POINT.
- Wait for the readings to stabilize, and record the measurement values.

Easy Evaluation

The Vibration Pen ^{plus} tool's front-panel LCD simultaneously shows overall velocity vibration readings in mm/s RMS (CMVP 50) or in in/s eq. Peak (CMVP 40), and acceleration enveloping readings in g^E ("E" indicating Enveloped acceleration).

The SKF Vibration Pen ^{plus} severity card provides quick reference for ISO Standard 10816 overall velocity vibration comparisons.

General Severity Level Guidelines

When considering severity levels, one should always be aware that even standards can only provide general guidelines to determine initial alarm settings. At no time should such guidelines substitute for experience and good judgement. The most reliable method of determining alarm settings is to trend vibration readings over time, establish baseline values and alarm settings above baseline values.

Vibration Measured In Velocity

For velocity vibration, ISO standards like ISO 10816, First Edition 1995 or VDI 2056 guidelines are generally accepted. ISO 10816 with the title 'Mechanical vibration – Evaluation of

* ISO (International Organization for Standardization)

machine vibration by measurements on non-rotating parts' consists of six parts. Part 1 (10816-1) determines general guidelines and are superseded by the following, more explicit parts of ISO 10816, like part 2 (10816-2) for Land-based steam turbines and generators in excess of 50 MW with normal operating speeds of 1500 r/min, 1800 r/min, 3000 r/min and 3600 r/min.

The severity chart shown in Table 1, is in accordance with the ISO 10816-2 guidelines. For exceptions to this guideline and for more details, please refer to the ISO 10816-2 document itself.

Industrial machines with nominal power above 15 kW and nominal speeds between 120 rpm and 15000 rpm when measured in situ are covered by ISO 10816-3.

The machines are separated into four different groups:

GROUP 1

Large machinery and electrical machines with shaft height greater than 315 mm. These machines are normally equipped with sleeve bearings.

GROUP 2

Medium-size machines and electrical machines with shaft height in between 160 mm and 315 mm.

These machines are normally equipped with rolling element bearings and operating speeds above 600 rpm.

GROUP 3

Pumps with multivane impeller and with separate driver with rated power above 15 kW.

Machines of this group may be equipped with sleeve or element bearings.

GROUP 4

Pumps with multivane impeller and with integrated driver.

Machines of this group mostly have sleeve or element bearings.

Table 1. Vibration Severity Chart ISO 10816-2.

ISO 10816-2		Steam Turbines and Generators	
Velocity		Speed (rpm)	
CMVP 40 in/sec eq. Peak	CMVP 50 mm/sec RMS	1500 or 1800	3000 or 3600
0.66	11.8	DAMAGE OCCURS	
0.56	10.0		
0.47	8.5		
0.42	7.5	RESTRICTED OPERATION	
0.29	5.3		
0.21	3.8	UNRESTRICTED OPERATION	
0.16	2.8		
0.13	1.4	NEWLY COMMISSIONED MACHINERY	
0.00	0.0		

Table 2. Vibration Severity Chart ISO 10816-3.

ISO 10816-3		Machinery Groups 2 and 4		Machinery Groups 1 and 3	
Velocity		Rated Power			
CMVP 40 in/sec eq. Peak	CMVP 50 mm/sec RMS	15 kW - 300 kW		Group 1: 300 kW - 50 MW Group 3: Above 15 kW	
0.61	11.0	DAMAGE OCCURS	RESTRICTED OPERATION	UNRESTRICTED OPERATION	NEWLY COMMISSIONED MACHINERY
0.39	7.1				
0.25	4.5				
0.19	3.5	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	NEWLY COMMISSIONED MACHINERY
0.16	2.8				
0.13	2.3	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	NEWLY COMMISSIONED MACHINERY
0.08	1.4				
0.04	0.7	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	UNRESTRICTED OPERATION	NEWLY COMMISSIONED MACHINERY
0.00	0.0				
Foundation		Rigid	Flexible	Rigid	Flexible

Vibration Pen^{plus}

CMVP 40
(in/s) eq. Peak
CMVP 50
(mm/s) RMS

Specifications

Vibration Pickup: Piezoelectric acceleration integrated sensor (compression type)

Measurement Range: 1 to 55 mm/s (RMS) 0.06 to 3.00 in/s (eq. Peak)

Tolerance: ± 10% and 2 digits measured at 80 Hz

Frequency Range:

Overall Vibration:
10 Hz to 1,000 Hz
(Tolerances measured within the frequency range are in accordance with ISO 3945 and 2 digits.)

Acceleration Enveloping:
10 kHz to 30 kHz

Display: Measurement Value 3.5 digit LCD

Display Cycle: Approximately one (1) second

Overload Indication: OVER

Battery Replacement Indication: BATT

Hold Indication: HOLD

Power: Two (2) CR2032 lithium batteries

Battery Lifetime: 170 mA hours Current consumption

Measurement mode: 7.5 mA

HOLD mode: 3.0 mA

Auto Power Off Function: Power is turned off approximately two minutes after last ON or HOLD operation

Dimensions: Height: 0.7" (17.8 mm)


Width: 1.2" (30.5 mm)

Length: 6.2" (157.5 mm)

Weight: Approximately 2.7 oz. (77 g) with batteries

Ambient Operating Conditions: +14°F to +122°F (-10°C to +50°C)

20% to 90% relative humidity

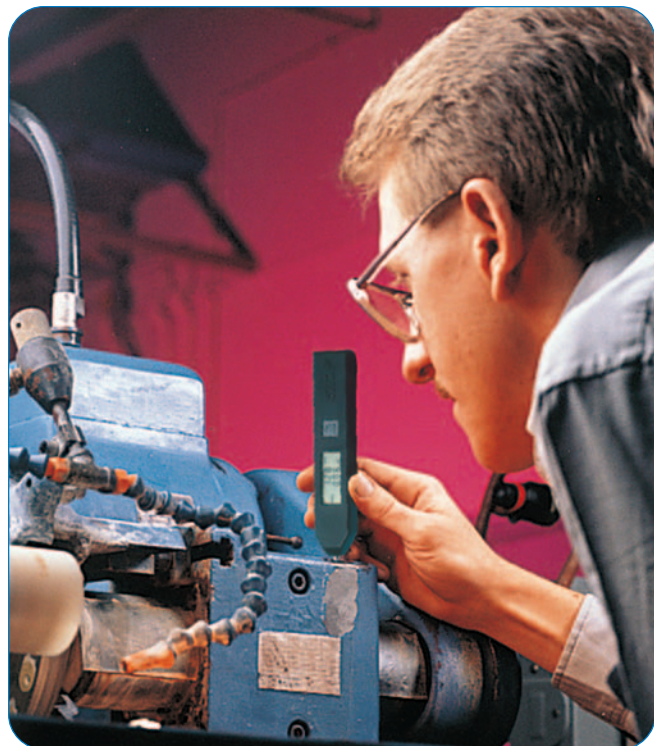

Ordering Information

CMVP 40 (in/s) eq. Peak Vibration Pen^{plus}

CMVP 50 (mm/s) RMS Vibration Pen^{plus}



SKF Reliability Systems

5271 Viewridge Court • San Diego, California 92123 USA
Telephone: +1 858-496-3400 • FAX: +1 858-496-3531

Web Site: www.skf.com/reliability

Although care has been taken to assure the accuracy of the data compiled in this publication, SKF does not assume any liability for errors or omissions. SKF reserves the right to alter any part of this publication without prior notice.

- SKF is a registered trademark of SKF.
- All other trademarks are the property of their respective owners.

CM2081 (Revised 10-04) • Copyright © 2004 by SKF Reliability Systems. ALL RIGHTS RESERVED.

